



## 产品特性




- 采用Intel Elkhart Lake J6413四核处理器
- 单条DDR4-3200 SO-DIMM 插槽支持最大 32GB
- HDMI+DP双显示
- 双RJ45 2.5Gb高速以太网
- 支持M.2 3042 4G/5G模组(可选WI-FI)
- 支持M.2 Key-M 2242/2280 SATA协议的SSD
- 4x RS232/422/485
- 3xUSB3.0, 1xUSB2.0

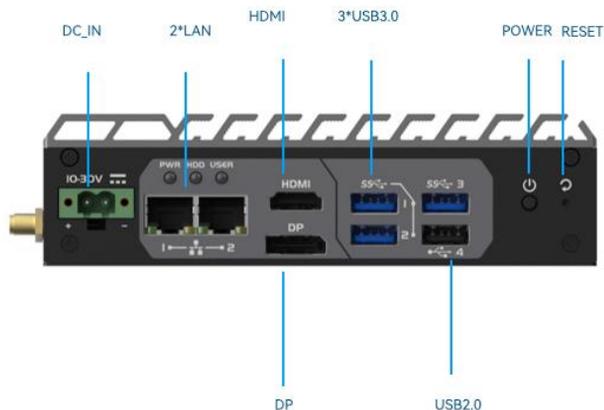

## 接口布局

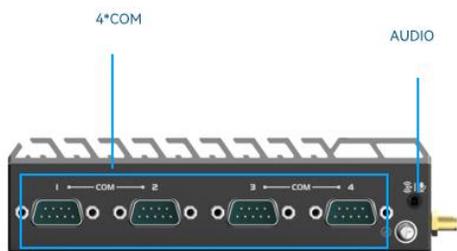

## 产品尺寸

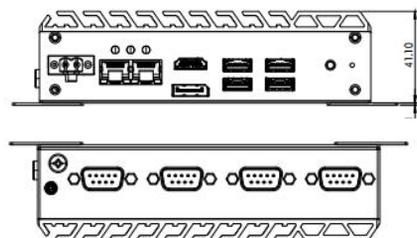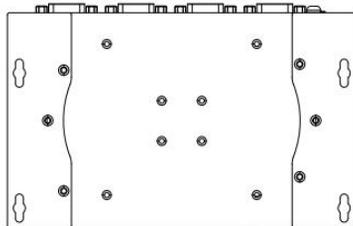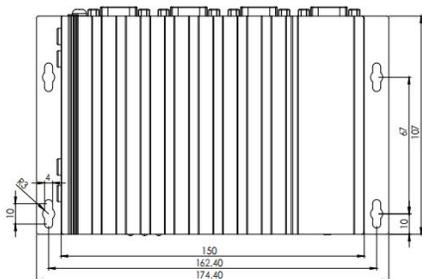

系统	处理器	Intel® Celeron® Elkhart Lake J6413, TDP 6W
	芯片组	Intel® Elkhart Lake SoC
	BIOS	AMI UEFI BIOS
	内存	1xDDR4 3200MHz SO-DIMM, up to 32GB
	操作系统	Windows10, Linux
I/O 接口	USB	3xUSB 3.0, 1xUSB 2.0
	COM	4xRS232/422/485
	LED	1xPower, 1xHDD, 1xUser
扩展	PCIe/M.2/Mini-PCIe	1xM.2 Key B-Socket (3042, USB3+PCIe x1) support 4G/5G module (可选WiFi-BT module)
显示	Graphics Processor	Intel CPU集成Gen.11 Graphics Engines
	Interface	1xDP, up to 4096 x 2160 @60Hz 1xHDMI, up to 4096 x 2160 @60Hz
存储	SATA/M.2/mSATA	1xM.2 Key-M Socket (2242/2280,SATA)
音频	Audio IC	Realtek ALC897
	Audio Interface	1xMic-in, 1xLine-out (2 in 1)
以太网	LAN IC	2x i226V
	Interface	2xRJ45
电源	Power Input	12V to 30V, DC-in
	Power Interface	2Pin凤凰端子输入
其它	Watchdog Timer	1 to 255 sec./min. per step
	TPM	Infineon SLB9670 supports TPM 2.0
物理参数	Dimensions	150mm(L)×107mm(W)×41.1mm(H)
	Weight	净重0.8KG
	Mounting	桌面式、壁挂式、DIN导轨式
工作环境	Operating Temp.	-10~60°C 带0.7 m/s风流
	Storage Temp.	-40~85°C
	Humidity	10%~85% Humidity, non-condensing
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	With SSD:2Grms, IEC 60068-2-64, random, 5~500Hz, 1 hr/axis

## 产品选型

型号	处理器	显示	DIMM	LAN	USB3. 0	USB2. 0	COM	M.2
JEC-3010	J6413	2	1	2	3	1	4	1

## 装箱清单

配件编号	描述	数量
JEC-3010	JEC-3010准系统	1
200200000 183	转接卡 M2-3042 to M2-2230	1
300600000 183	电源适配器,90W,100V~240V AC Input,19V,4.74A,10.5*2.5*20mm	1
301800000 463	电源线,1.5m	1
NA	螺丝包	1
302300000 938	DinRail滑块	1
302300016 736	壁挂支架(左)	1
302300016 737	壁挂支架(右)	1